AbriFill®

AbriFill is a round profile seal made of closed-cell polyethylene (PE) foam that prevents draughts and heat loss. It serves as reliable filling of building joints which can be easily filled afterwards with spray sealants. AbriFill is compatible with all standard sealing materials.

FEATURES

- Round joint filler
- Limits the depth of the joint before applying sealant
- Seals gaps and cracks
- Reduces consumption of filler
- Compatible with all types of sealant
- Moisture-resistant
- Easy to apply

APPLICATIONS

- Sound insulation
- Sealing of infills, connection joints, construction and expansion joints
- Sealing of windows and doors
- Fills all expansion joints and/or deep cracks





BENEFITS

- High flexibility
- Available in different Ø
- Does not absorb water
- Highly chemical-resistant

ABRISO Jiffy

WE CREATE. WE SUSTAIN. WE PROTECT.

abrisojiffy.com

AbriFill®

TECHNICAL DATA


- Closed-cell recyclable polyethylene foam (PE)
- Water absorption < 3% DIN53420
- λ value: 0,045 W/m°K at 20°C (DIN52613)
- Temperature resistance -40°C to +70°C
- Could be used following DTU 44.1



AVAILABILITY

JOINT WIDTH	Ø ABRIFILL
3 – 4 mm	6 mm
4 – 6 mm	8 mm
5 – 7 mm	10 mm
6 – 9 mm	13 mm
7 – 10 mm	15 mm
12 – 15 mm	20 mm
17 – 20 mm	25 mm
22 – 25 mm	30 mm
32 – 35 mm	40 mm
42 – 45 mm	50 mm

JOINT DEPTH = JOINT WIDTH / 3 + 6 MM

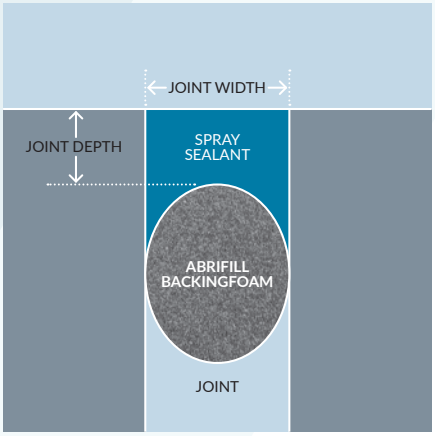

TALK TO OUR TEAM TODAY

building@abrisojiffy.com

abrisojiffy.com

ABRISO Jiffy®

WE CREATE. WE SUSTAIN. WE PROTECT.